

ULTRA ALKALINE



Technological Innovation


- Increase the usage of EMD in new battery in order to enhance the performance.
- Much loose network structure, ensure full reactions and brings better discharge ability.
- Special additives increase the material activity, and greatly strengthen the medium-drain and low-drain performance.
- Super Conducting Material (SCM Technology) makes incredible high capacity.
- More stronger alkali resistance, aging resistance with outstanding safety performance.
- Better leakage proof performance with patented Nylon Gasket.

TYPE	DIAMETER	HEIGHT	WEIGHT	CAPACITY	TESTING CONDITION
AA	13.9~14.4 MM	49.9~50.4 MM	0.0235 KG	2950 mAh	(10mA,24h/d,20°C,e.v.=0.8V)
AAA	9.9~10.4 MM	43.8~44.5 MM	0.0115 KG	1300 mAh	(10mA,24h/d,20°C,e.v.=0.8V)
C	25.0~26.0 MM	49.0~50.0 MM	0.0714 KG	8000 mAh	(25mA,24h/d,20°C,e.v.=0.8V)
D	33.0~34.0 MM	59.6~61.0 MM	0.1456 KG	18400 mAh	(25mA,24h/d,20°C,e.v.=0.8V)
9V	L(24.5~26.5) MM W(15.5~17.5) MM	46.5~48.5 MM	0.0450 KG	550 mAh	(35mA,24h/d,20°C,e.v.=5.4V)
23A	9.9~10.6 MM	27.7~28.5 MM	0.0081 KG	50 mAh	(10KΩ,24h/d,20°C,e.v.=6V)
27A	7.4~8.0 MM	27.0~28.2 MM	0.0046 KG	20 mAh	(20KΩ,24h/d,20°C,e.v.=6V)
N	10.9~12.0 MM	29.1~30.2 MM	0.0090 KG	880 mAh	(300Ω,12h/d,20°C,e.v.=0.9V)
AAAA	7.7~8.3 MM	41.5~42.5 MM	0.00641 KG	500 mAh	(35mA,24h/d,20°C,e.v.=0.8V)
3LR12	L(60.0~62.0) MM W(20.0~22.0) MM	63.0~67.0 MM	0.1608 KG	4200 mAh	(20KΩ,24h/d,20°C,e.v.=2.7V)
4LR61	L(35.1~35.6) MM W(8.7~9.2) MM	47.0~48.5 MM	0.0313 KG	500 mAh	(35mA,24h/d,20°C,e.v.=3.2V)
4LR25	L(65.0~67.0) MM W(65.0~67.0) MM	108.0~115.0 MM	0.8450 KG	16000 mAh	(9.1KΩ,24h/d,20°C,e.v.=3.6V)





AA / LR6 / 1.5V / 4 PACK

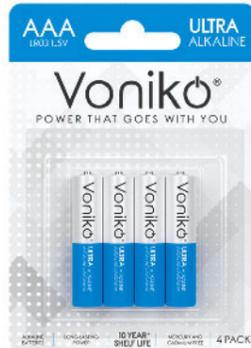

AAA / LR03 / 1.5V / 4 PACK




C / LR14 / 1.5V / 2 PACK




D / LR20 / 1.5V / 2 PACK



9V / 6LR61 / 1 PACK




23A / 12V / 1 PACK




27A / 12V / 1 PACK



N / LR1 / 2 PACK



AAAA / LR8D425 / 2 PACK



J / 4LR61 / 1 PACK



3LR12 / 4.5V / 1 PACK



4LR25 / 6V / 1 PC

For your daily life devices

wireless mouse and keyboard, torches, radios, CD/MP3 players, remote controls, digital cameras, electric games, tape recorders, toys, shavers, flashlight, smoke alarm detectors...

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
Blister Packing & Shrink Packing					
AA / LR6 / 1.5V	4 PACK / CARD	20 CARDS	160 CARDS	393 x 302 x 193 MM	17.0 KGS
AAA / LR03 / 1.5V	4 PACK / CARD	30 CARDS	240 CARDS	393 x 294 x 214 MM	13.6 KGS
C / LR14 / 1.5V	2 PACK / CARD	12 CARDS	96 CARDS	393 x 302 x 192 MM	15.3 KGS
D / LR20 / 1.5V	2 PACK / CARD	12 CARDS	48 CARDS	324 x 204 x 240 MM	15.1 KGS
9V / 6LR61	1 PACK / CARD	30 CARDS	240 CARDS	393 x 302 x 327 MM	13.7 KGS
23A / 12V	1 PACK / CARD	30 CARDS	240 CARDS	377 x 264 x 207 MM	3.9 KGS
27A / 12V	1 PACK / CARD	30 CARDS	240 CARDS	377 x 264 x 165 MM	2.9 KGS
N / LR1 / 1.5V	2 PACK / CARD	30 CARDS	240 CARDS	377 x 274 x 223 MM	6.9 KGS
AAAA / LR8D425 / 1.5V	2 PACK / CARD	30 CARDS	240 CARDS	375 x 265 x 179 MM	5.6 KGS
J / 4LR61 / 6V	1 PACK / CARD	30 CARDS	240 CARDS	379 x 281 x 196 MM	10.1 KGS
3LR12 / 4.5V	1 PACK / CARD	10 CARDS	80 CARDS	391 x 343 x 152 MM	14.7 KGS
4LR25 / 6V	1 PC / SHRINK	6 PCS	18 PCS	459 x 229 x 143 MM	16.0 KGS



VONIKO COMMITMENT TO PROTECTING ENVIRONMENT

VARIOUS PAPER PACKAGE PATTERNS



PREMIUM ALKALINE



- The revolutionary performance improved for all kinds of appliance, especially for some high drain device, as well as for some medium and low drain device.
- The new technology and formula makes the battery performance even longer discharging time.
- Select new improved more active and specify particle size for cathode and anode raw material, increase the battery raw material utilization and better capacity.
- Use different thickness technology to reduce the steel can thickness to enlarge the inner space, and increase battery capacity.

TYPE	DIAMETER	HEIGHT	WEIGHT	CAPACITY	TESTING CONDITION
AA	14.0~14.5 MM	49.9~50.4 MM	0.02370 KG	3000 mAh	(10mA,24h/d,20°C,e.v.=0.8V)
AAA	9.9~10.5 MM	43.8~44.5 MM	0.01165 KG	1320 mAh	(10mA,24h/d,20°C,e.v.=0.8V)



AA / LR6 / 1.5V / 4 PACK



AAA / LR03 / 1.5V / 4 PACK

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
Blister Packing					
AA / LR6 / 1.5V	4 PACK / CARD	12 CARDS	96 CARDS	302 x 204 x 233 MM	10.3 KGS
AAA / LR03 / 1.5V	4 PACK / CARD	12 CARDS	96 CARDS	294 x 204 x 183 MM	5.6 KGS

LITHIUM BATTERY



TYPE	DIAMETER	HEIGHT	WEIGHT
CR123A / 3V	16.0~17.0 MM	33.5~34.5 MM	0.0160 KG
CR2 / 3V	15.0~16.0 MM	26.0~26.9 MM	0.0100 KG
2CR5 / 6V	L(32.5~34.0) MM W(16.0~17.0) MM	43.5~45.0 MM	0.0350 KG
CR-P2 / 6V	L(32.5~35.0) MM W(18.5~19.5) MM	34.5~36.0 MM	0.0340 KG




Lithium Cylindrical

- Excellent high current discharge performance
- Wide operating temperature range of -40°C to +60°C and excellent discharge performance at extremely low temperatures
- Built-in safety mechanism
- Environmental friendly

Cell Construction

- Energy density high voltage
- Excellent storability
- Excellent discharge performance at extreme ambient temperature
- Superior safety design, specific crimp design for leakage proof
- Low self discharge rate of less than 1% per year
- Our wide product range is the ideal options for use-replaceable electronic devices

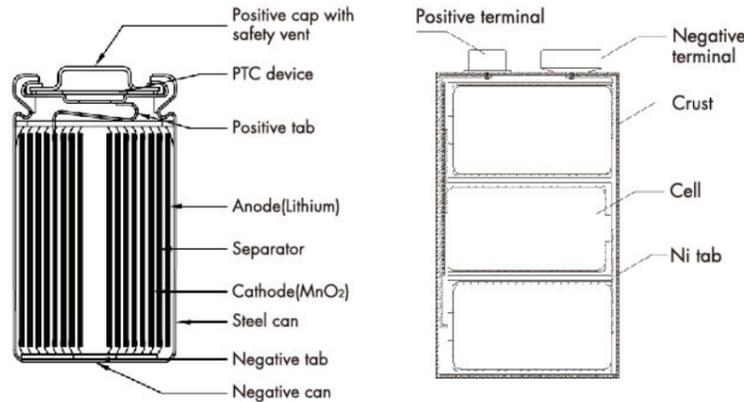

TYPE	DIAMETER	HEIGHT	WEIGHT
AA / FR6 / 1.5V	13.7~14.5 MM	49.5~50.5 MM	0.0150 KG
AAA / FR03 / 1.5V	9.8~10.5 MM	43.5~44.5 MM	0.0075 KG
CR-V9 / 9V	L(25.0~26.5) MM W(15.5~17.5) MM	47.5~48.5 MM	0.0340 KG



9V/CR-V9

- Long shelf life of 10 years
- Excellent high current discharge performance
- 5 times longer lasting than alkaline batteries
- Built-in safety mechanism
- Environmentally friendly
- Wide operating temperature range of -40°C to +60°C and excellent discharge performance at extremely low temperature

AA/FR6 & AAA/FR03

- Suitable for power hungry / medical / professional devices.
- 40% lighter than alkaline battery
- Performs well in extreme weather(-30°C to 60°C)
- Built-in short-circuit safety protection
- Long shelf life of 10 years

SHELF LIFE
10 YEAR

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
Blister Packing					
AA / FR6 / 1.5V	4 PACK / CARD	10 CARDS	160 CARDS	393 x 302 x 198 MM	11.6 KGS
AAA / FR03 / 1.5V	4 PACK / CARD	10 CARDS	160 CARDS	393 x 294 x 158 MM	6.6 KGS
CR123A / 3V	1 PACK / CARD	10 CARDS	200 CARDS	488 x 274 x 218 MM	5.7 KGS
CR2 / 3V	1 PACK / CARD	10 CARDS	200 CARDS	488 x 274 x 206 MM	4.3 KGS
2CR5 / 6V	1 PACK / CARD	10 CARDS	200 CARDS	488 x 274 x 226 MM	9.7 KGS
CR-P2 / 6V	1 PACK / CARD	10 CARDS	200 CARDS	488 x 276 x 252 MM	9.9 KGS
CR-V9 / 9V	1 PACK / CARD	10 CARDS	200 CARDS	488 x 282 x 232 MM	9.6 KGS


LITHIUM COIN CELL



- High energy density
- Wide range of operating temperatures from -10°C to +60°C
- Flat discharge voltage
- Environmental friendly
- Broad range of sizes and models

TYPE	DIAMETER	HEIGHT	WEIGHT	CAPACITY	TEST MODE	CUT-OFF	DURATION(MAD)
CR2032 / 3V	19.7~20.0MM	2.9~3.2MM	0.0032KG	220MAH	2KΩ,24H/D	2.0V	140H
					15KΩ,24H/D	2.0V	1050H
CR2025 / 3V	19.7~20.0MM	2.2~2.5MM	0.0027KG	160MAH	2KΩ,24H/D	2.0V	100H
					15KΩ,24H/D	2.0V	788H
CR2016 / 3V	19.7~20.0MM	1.4~1.6MM	0.0018KG	80MAH	4.7KΩ,24H/D	2.0V	128H
					30KΩ,24H/D	2.0V	800H
CR1616 / 3V	15.7~16.0MM	1.4~1.6MM	0.0012KG	50MAH	3KΩ,24H/D	2.0V	48H
					30KΩ,24H/D	2.0V	500H
CR1620 / 3V	15.7~16.0MM	1.8~2.0MM	0.0013KG	70MAH	3KΩ,24H/D	2.0V	68H
					47KΩ,24H/D	2.0V	1010H
CR1632 / 3V	15.8~16.0MM	3.0~3.2MM	0.0020KG	130MAH	3KΩ,24H/D	2.0V	105H
					30KΩ,24H/D	2.0V	1230H
CR1216 / 3V	12.2~12.5MM	1.4~1.6MM	0.0007KG	25MAH	6.8KΩ,24H/D	2.0V	54H
					62KΩ,24H/D	2.0V	510H
CR1220 / 3V	12.2~12.5MM	1.8~2.0MM	0.0009KG	40MAH	3KΩ,24H/D	2.0V	31H
					62KΩ,24H/D	2.0V	750H
CR1225 / 3V	12.2~12.5MM	2.2~2.5MM	0.0010KG	50MAH	3KΩ,24H/D	2.0V	46H
					30KΩ,24H/D	2.0V	470H
CR2430 / 3V	24.2~24.5MM	2.7~3.0MM	0.0040KG	290MAH	15KΩ,24H/D	2.0V	1400H
CR2450 / 3V	24.2~24.5MM	4.6~5.0MM	0.0070KG	580MAH	7.5KΩ,24H/D	2.0V	1200H

For small electronic devices
remote controls, watches, calculators,
thermometers, car alarms and computer memory back-up...

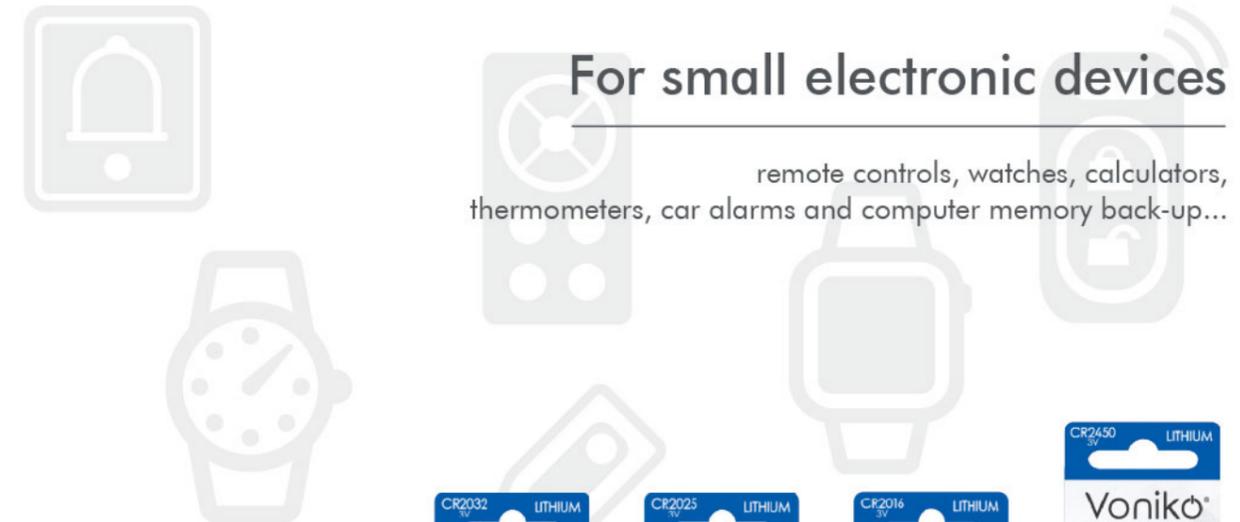

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
CR2032 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	5.0 KGS
CR2025 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	4.4 KGS
CR2016 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	3.8 KGS
CR1616 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	3.3 KGS
CR1620 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	3.3 KGS
CR1632 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	4.0 KGS
CR1216 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	2.7 KGS
CR1220 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	2.9 KGS
CR1225 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 220 X 210 MM	3.0 KGS
CR2430 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 283 X 294 MM	7.1 KGS
CR2450 / 3V	5 PACK / CARD	20 CARDS	200 CARDS	295 X 283 X 294 MM	9.6 KGS

ALKALINE BUTTON CELL




- Dependable power & long life
- Comprehensive product range
- Multi applications
- Deliver power requirement for small electronic devices
- Environmental friendly

TYPE	DIAMETER	HEIGHT	WEIGHT	CAPACITY	TEST MODE	CUT-OFF	DURATION (MAD)
AG0 / LR521 / 1.5V	5.55~5.80mm	1.90~2.15mm	0.00028kg	5mAh	68KΩ,24h/d	1.2V	≥265h
AG1 / LR621 / 1.5V	6.50~6.80mm	1.90~2.15mm	0.00030kg	6mAh	68KΩ,24h/d	1.2V	≥285h
AG2 / LR726 / 1.5V	7.55~7.90mm	2.30~2.60mm	0.00038kg	14mAh	33KΩ,24h/d	1.2V	≥325h
AG3 / LR41 / 1.5V	7.55~7.90mm	3.30~3.60mm	0.00064kg	23mAh	22KΩ,24h/d	1.2V	≥365h
AG4 / LR66 / 1.5V	6.60~6.80mm	2.40~2.60mm	0.00034kg	12mAh	47KΩ,24h/d	1.2V	≥350h
AG5 / LR754 / 1.5V	7.55~7.90mm	5.00~5.40mm	0.00090kg	40mAh	15KΩ,24h/d	1.2V	≥435h
AG6 / LR921 / 1.5V	9.25~9.50mm	1.85~2.10mm	0.00055kg	16mAh	33KΩ,24h/d	1.2V	≥390h
AG7 / LR927 / 1.5V	9.15~9.50mm	2.40~2.70mm	0.00064kg	22mAh	22KΩ,24h/d	1.2V	≥340h
AG8 / LR55 / 1.5V	11.25~11.60mm	1.85~2.10mm	0.00086kg	23mAh	22KΩ,24h/d	1.2V	≥380h
AG9 / LR936 / 1.5V	9.25~9.50mm	3.30~3.60mm	0.00088kg	40mAh	15KΩ,24h/d	1.2V	≥660h
AG10 / LR54 / 1.5V	11.25~11.60mm	2.75~3.05mm	0.00120kg	45mAh	15KΩ,24h/d	1.2V	≥480h
AG11 / LR721 / 1.5V	7.55~7.90mm	1.85~2.10mm	0.00038kg	11mAh	47KΩ,24h/d	1.2V	≥380h
AG12 / LR43 / 1.5V	11.25~11.60mm	3.80~4.20mm	0.00160kg	85mAh	10KΩ,24h/d	1.2V	≥530h
AG13 / LR44 / 1.5V	11.25~11.60mm	5.00~5.40mm	0.00200kg	115mAh	6.8KΩ,24h/d	1.2V	≥480h

For small electronic devices

calculators, watches, games,
keyless entry remotes, mini torches, mini toys...

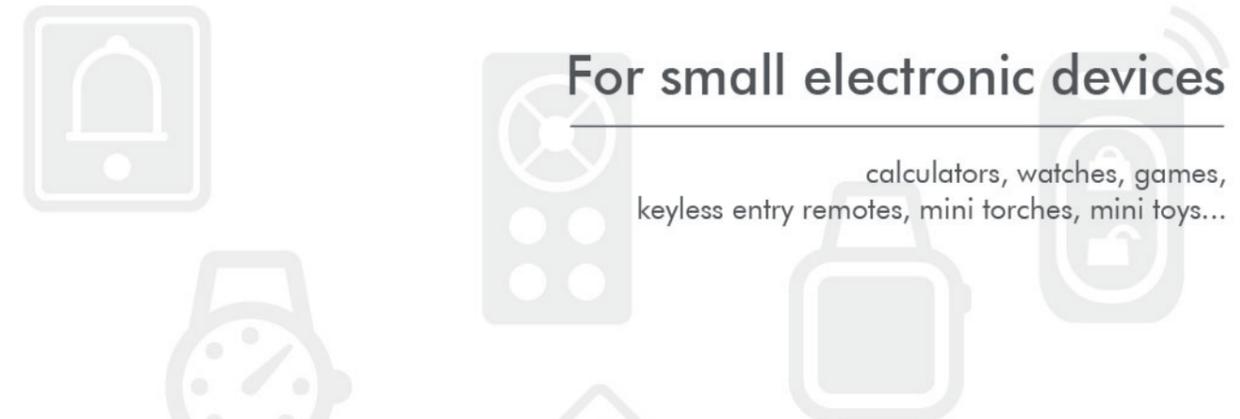

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
AG0 / LR521 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	1.9 KGS
AG1 / LR621 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	1.9 KGS
AG2 / LR726 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.5 KGS
AG3 / LR41 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.7 KGS
AG4 / LR66 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	1.9 KGS
AG5 / LR754 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.9 KGS
AG6 / LR921 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	2.2 KGS
AG7 / LR927 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.7 KGS
AG8 / LR55 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.7 KGS
AG9 / LR936 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.8 KGS
AG10 / LR54 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	3.1 KGS
AG11 / LR721 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.4 KGS
AG12 / LR43 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	3.4 KGS
AG13 / LR44 / 1.5V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	4.0 KGS

SILVER OXIDE BUTTON CELL



- Dependable power & long life
- Multi applications
- Deliver power requirement for small electronic devices



TYPE	DIAMETER	HEIGHT	WEIGHT	TEST MODE	CUT-OFF	DURATION (MAD)
SR54 / 389 / 1.55V	11.25~11.60mm	2.75~3.05mm	0.0012kg	1KΩ,24h/d	1.2V	≥26h
				15KΩ,24h/d	1.2V	≥580h
SR60 / 364 / 1.55V	6.55~6.80mm	1.90~2.15mm	0.0003kg	6.5KΩ,24h/d	1.2V	≥41h
				68KΩ,24h/d	1.2V	≥680h
SR66 / 377 / 1.55V	6.60~6.80mm	2.40~2.60mm	0.0003kg	6.5KΩ,24h/d	1.2V	≥65h
				47KΩ,24h/d	1.2V	≥680h
SR41 / 392 / 1.55V	7.55~7.90mm	3.30~3.60mm	0.0006kg	3KΩ,24h/d	1.2V	≥50h
				22KΩ,24h/d	1.2V	≥456h
SR44 / 357 / 1.55V	11.25~11.60mm	5.00~5.40mm	0.0020kg	1KΩ,24h/d	1.2V	≥48h
				6.8KΩ,24h/d	1.2V	≥536h

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
SR54 / 389 / 1.55V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	3.1 KGS
SR60 / 364 / 1.55V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	1.9 KGS
SR66 / 377 / 1.55V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 135 MM	2.0 KGS
SR41 / 392 / 1.55V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	2.7 KGS
SR44 / 357 / 1.55V	5 PACK / CARD	40 CARDS	200 CARDS	295 X 223 X 185 MM	4.3 KGS

ZINC AIR BUTTON CELL



- Dependable power & long life
- Stable operating voltage
- Wide range of operating temperatures

OPTIMIZED FOR
DIGITAL HEARING AID

TYPE	DIAMETER	HEIGHT	WEIGHT	TEST MODE	CUT-OFF	DURATION (MAD)
PR41 / ZA312 / 1.45V	7.55~7.90mm	3.30~3.60mm	0.0005kg	560Ω,24h/d	0.9V	≥40h
				1.5KΩ,24h/d	0.9V	≥110h
PR44 / ZA675 / 1.45V	11.35~11.60mm	5.00~5.40mm	0.0017kg	150Ω,24h/d	0.9V	≥40h
				620Ω,24h/d	0.9V	≥175h
PR48 / ZA13 / 1.45V	7.65~7.90mm	5.00~5.40mm	0.0008kg	330Ω,24h/d	0.9V	≥45h
				1.5KΩ,24h/d	0.9V	≥198h
PR70 / ZA10 / 1.45V	5.55~5.80mm	3.30~3.60mm	0.0003kg	1KΩ,24h/d	0.9V	≥42h
				3KΩ,24h/d	1.2V	≥132h

TYPE	PACK	INNER BOX	MIDDLE BOX	CTN	MEASUREMENT	G/W
PR41 / ZA312 / 1.45V	6 PACK / CARD	10 CARDS	100 CARDS	500 CARDS	400 X 315 X 120 MM	4.1 KGS
PR44 / ZA675 / 1.45V	6 PACK / CARD	10 CARDS	100 CARDS	500 CARDS	495 X 315 X 120 MM	8.3 KGS
PR48 / ZA13 / 1.45V	6 PACK / CARD	10 CARDS	100 CARDS	500 CARDS	495 X 315 X 120 MM	5.3 KGS
PR70 / ZA10 / 1.45V	6 PACK / CARD	10 CARDS	100 CARDS	500 CARDS	400 X 315 X 120 MM	3.5 KGS

RECHARGEABLE LOW SELF DISCHARGE



- Low self discharge rechargeable battery. No need to charge before first use. You can use Voniko low self discharge rechargeable batteries everyday and everywhere.
- Voniko low self discharge rechargeable batteries with good performance even in wide temperatures range of -20°C to 50°C
- Environmental friendly and great savings.


TYPE	CAPACITY	DIAMETER	HEIGHT	WEIGHT
HR6(Recyko+)	1000mAh	13.7~14.5MM	49.5~50.5MM	0.0210KG
	2000mAh			0.0285KG
HR03(Recyko+)	800mAh	9.8~10.5MM	43.3~44.5MM	0.0135KG
HR20	2500mAh	32.0~34.2MM	59.5~61.5MM	0.0645KG
	3000mAh			0.0670KG
	8000mAh			0.1440KG
HR14	2500mAh	24.8~25.9MM	48.6~50.5MM	0.0545KG
	3000mAh			0.0580KG
	4000mAh			0.0775KG
HR6	1300mAh	13.7~14.5MM	49.5~50.5MM	0.0228KG
	1600mAh			0.0255KG
	1800mAh			0.0265KG
	2100mAh			0.0281KG
	2200mAh			0.0305KG
	2300mAh			0.0291KG
	2400mAh			0.0296KG
	2450mAh			0.0297KG
2600mAh	0.0297KG			
HR03	600mAh	9.8~10.5MM	43.3~44.5MM	0.0112KG
	700mAh			0.0112KG
	850mAh			0.0138KG
	900mAh			0.0131KG
	950mAh			0.0136KG
HF9	170mAh	L(24.5~26.5)MM W(15.5~17.5)MM	46.5~48.5MM	0.0321KG
	200mAh			0.0350KG
	250mAh			0.0425KG



Ni-MH

Provide cost-effective, re-useable power for your daily life devices

wireless mouse and keyboard, torches, radios, CD/MP3 players, remote controls, digital cameras, electric games, tape recorders, toys, shavers, flashlight, microphone...

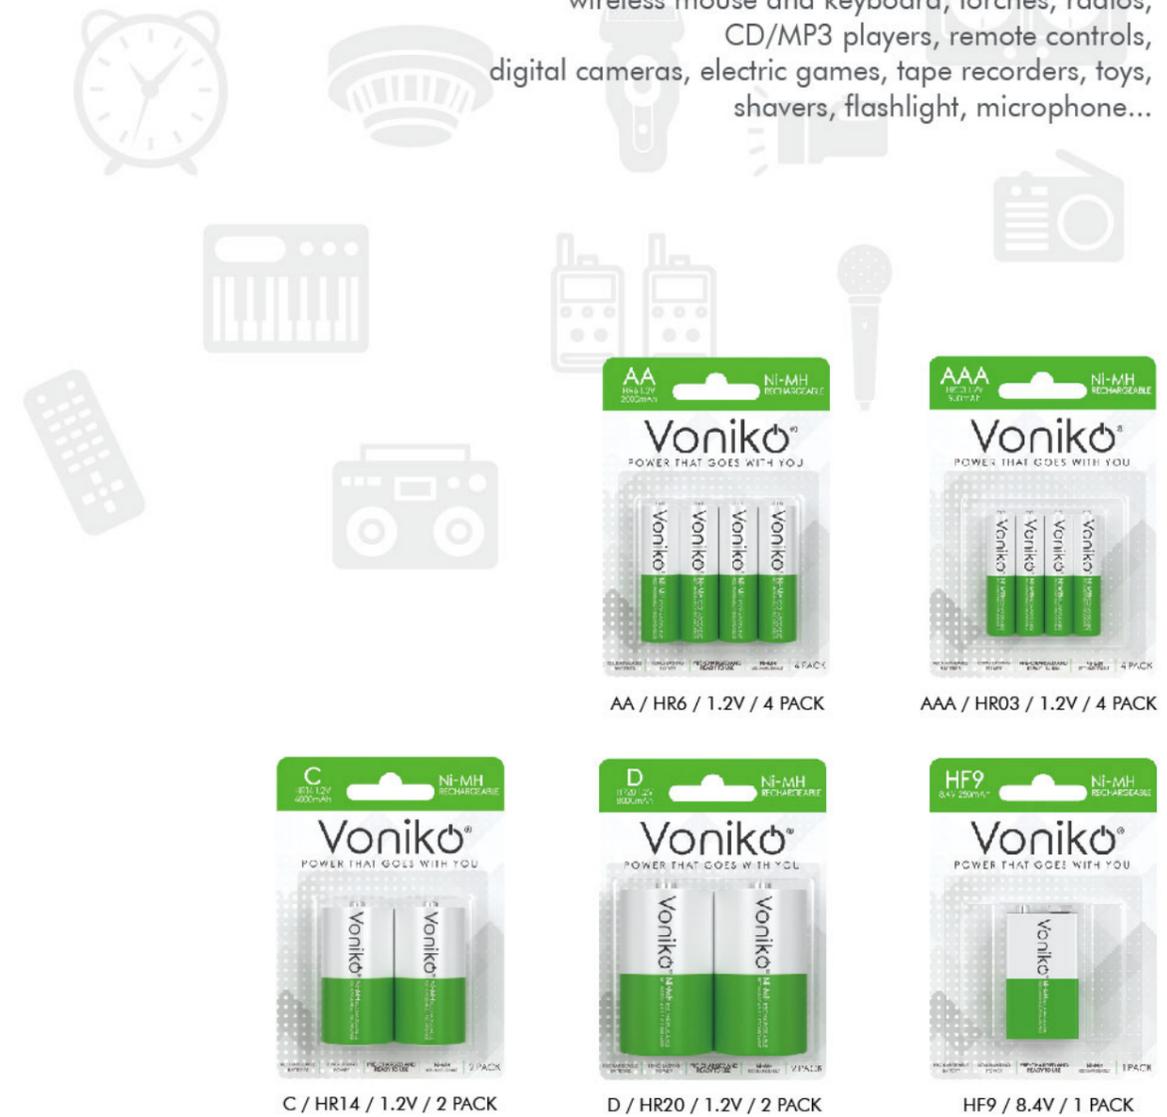

TYPE	PACK	INNER BOX	CTN	MEASUREMENT	G/W
Blister Packing					
AA / HR6 / 1.2V	4 PACK / CARD	20 CARDS	120 CARDS	313 x 308 x 200 MM	TBD
AAA / HR03 / 1.2V	4 PACK / CARD	30 CARDS	240 CARDS	405 x 306 x 222 MM	TBD
C / HR14 / 1.2V	2 PACK / CARD	12 CARDS	96 CARDS	405 x 312 x 201 MM	TBD
D / HR20 / 1.2V	2 PACK / CARD	12 CARDS	48 CARDS	334 x 214 x 252 MM	TBD
HF9 / 8.4V	1 PACK / CARD	30 CARDS	240 CARDS	403 x 308 x 336 MM	TBD

*TBD:G/W vary with Ni-MH battery capacity